

Part number:

HYDROMA

HYDRAULICKÉ SYSTÉMY

**HIDROMA
SYSTEMS**

UKŁADY HYDRAULICZNE

HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

Description

Machine

Author

Project

Pressure	60	bar	Fluid	HLP
Flow rate	30	l/min	Fluid type	ISO VG 46 (SUS 216)
D P max	0,7	bar	Viscosity	46 cst
Temperature	40	°C		
Filtration	A10 10 µm absolute inorga		Max operating pressure	60 bar - 870 psi


IN-LINE FILTER

Filter type	Size	Length	Bypass	Seals	Connection	Option 1	Filtration	Element
LMD	211	1	B	A	C	6	A10	N

Indicator

DLA20HA51P


DP Housing	0.06	bar	Element type	8CU2101A10ANP01
DP Element	0.09	bar	Connections	1 1/2"
DP complete filter	0.15	bar	No.Elem. in the housing	2

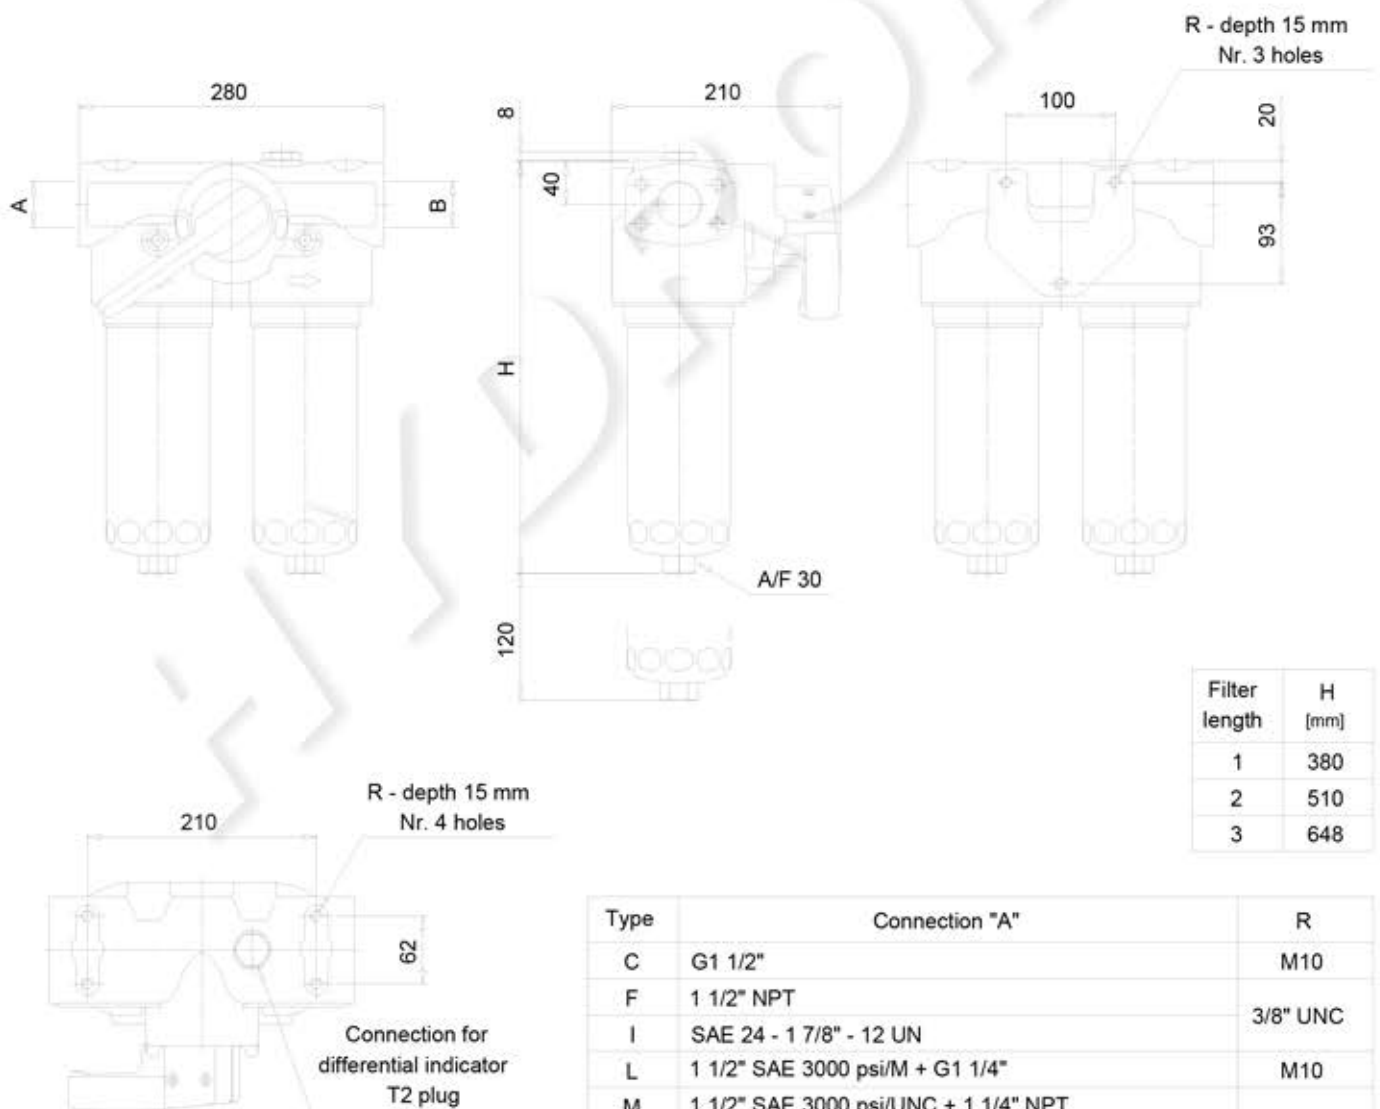

Description
Author

Machine
Project

Delta P/Q (Viscosity: 46 cst)

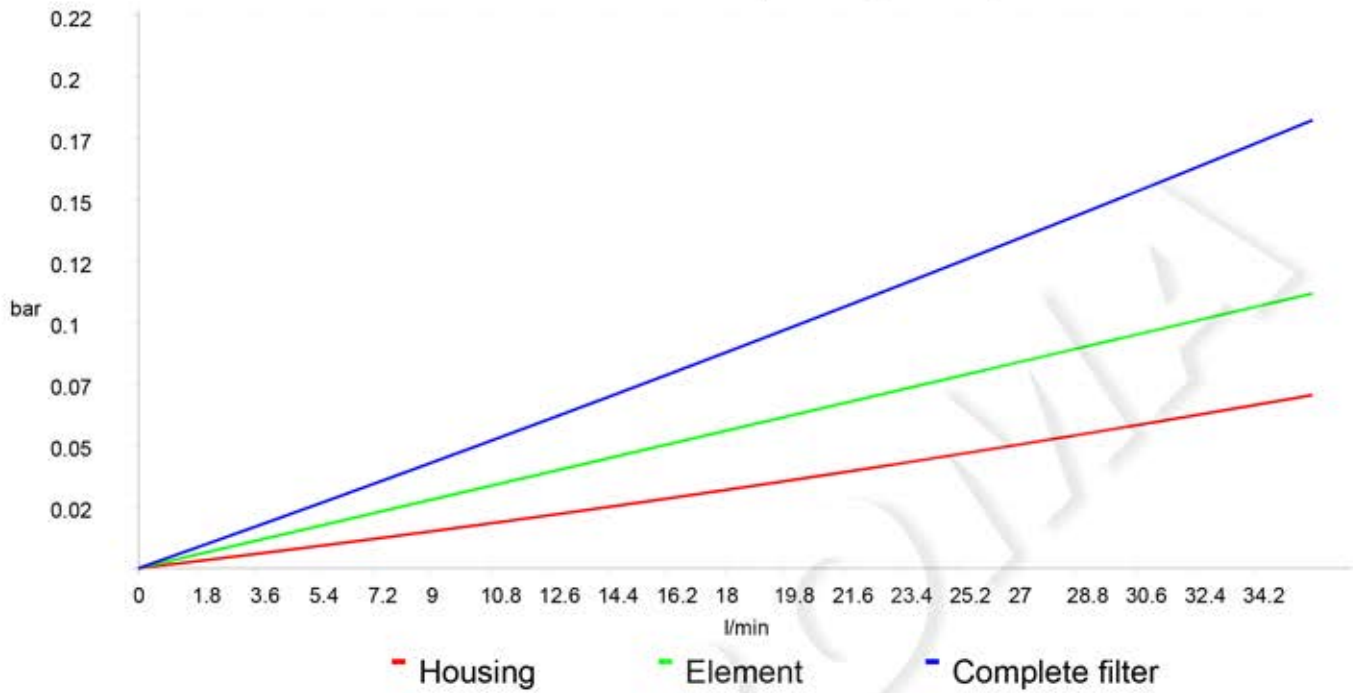

Delta P/T (Flow rate: 30 l/min)

