

Part number:

HYDROMA

HYDRAULICKÉ SYSTÉMY

HIDROMA
SYSTEMS

UKŁADY HYDRAULICZNE

HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

Description

Machine

Author


Project

Pressure	350	bar	Fluid	HLP
Flow rate	200	l/min	Fluid type	ISO VG 46 (SUS 216)
D P max	1,5	bar	Viscosity	46 cst
Temperature	40	°C		
Filtration	A10 10 µm absolute inorga		Max operating pressure	350 bar - 5075 psi

PRESSURE FILTER

Filter type	Size	Length	Bypass	Seals	Connection	Filtration	Element
FHD	333	2	B	A	F1	A10	R
Indicator DLA50HA51P							


DP Housing	0.91	bar	Element type	8HP3202A10ARP01
DP Element	0.54	bar	Connections	1 1/2"SAE 6000 PSI/M
DP complete filter	1.45	bar	No.Elem. in the housing	2

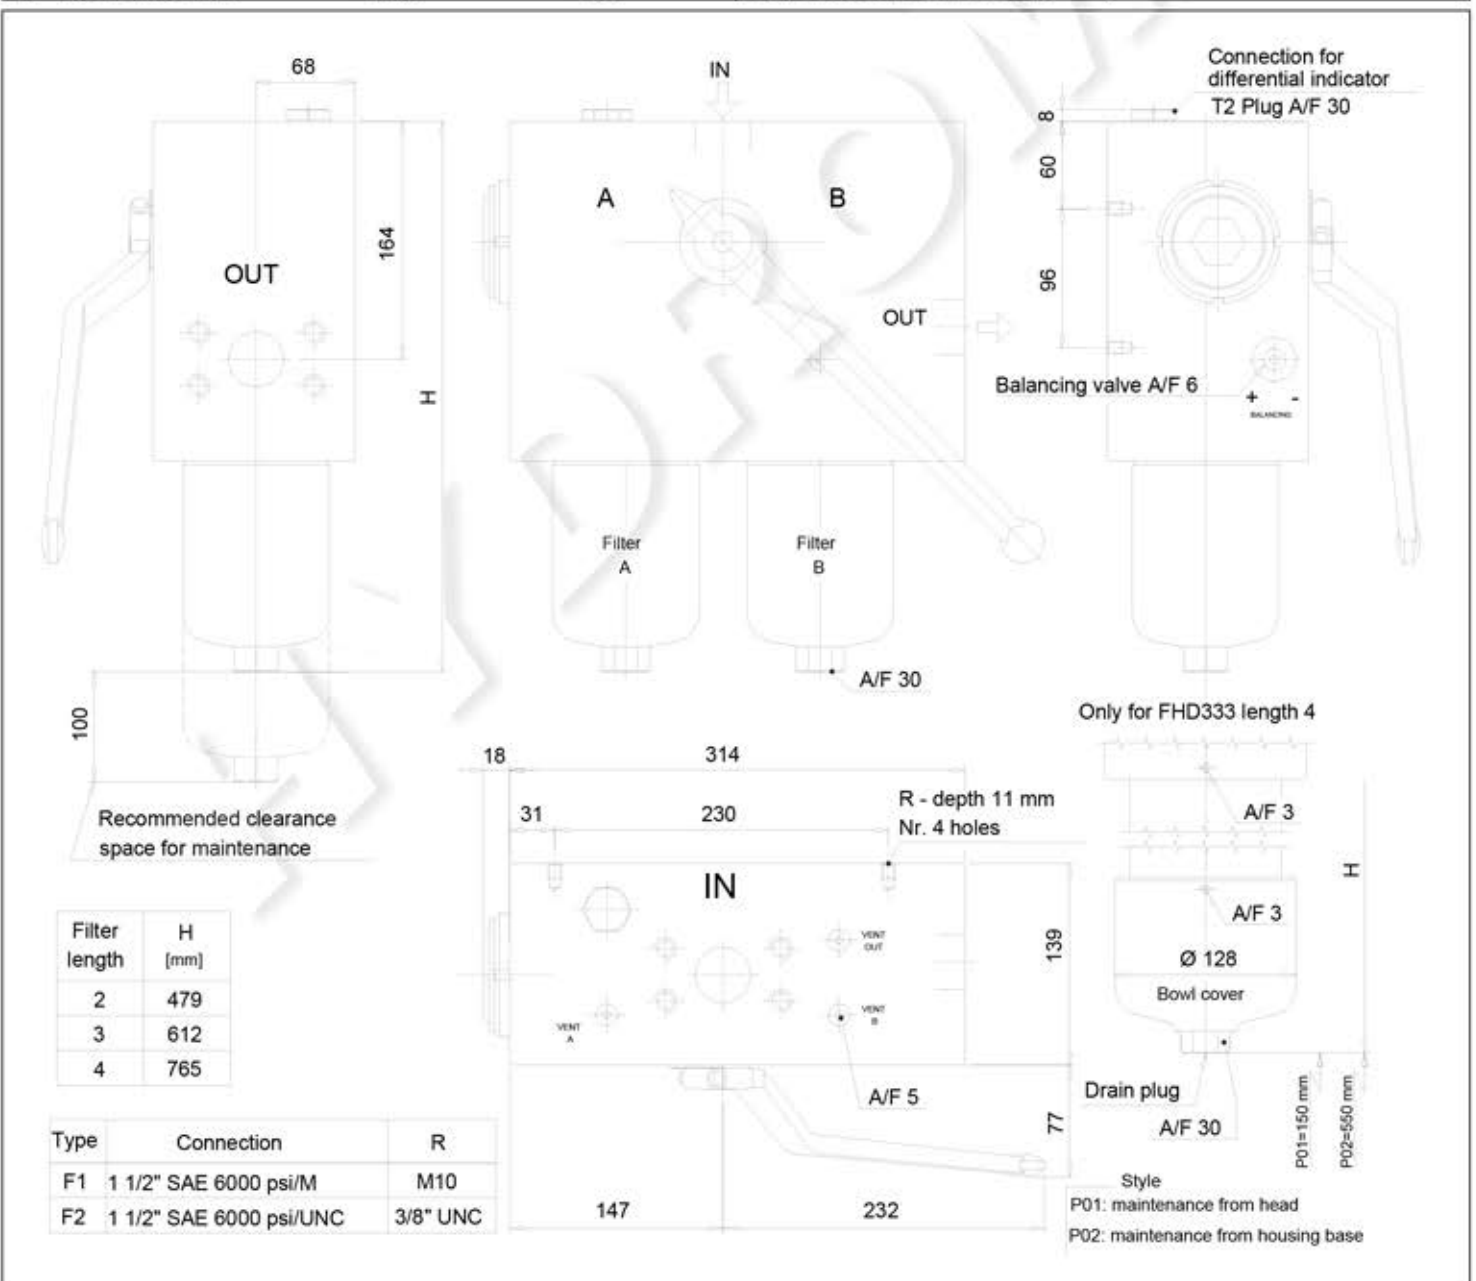

Description
Author

Machine
Project

Delta P/Q (Viscosity: 46 cst)

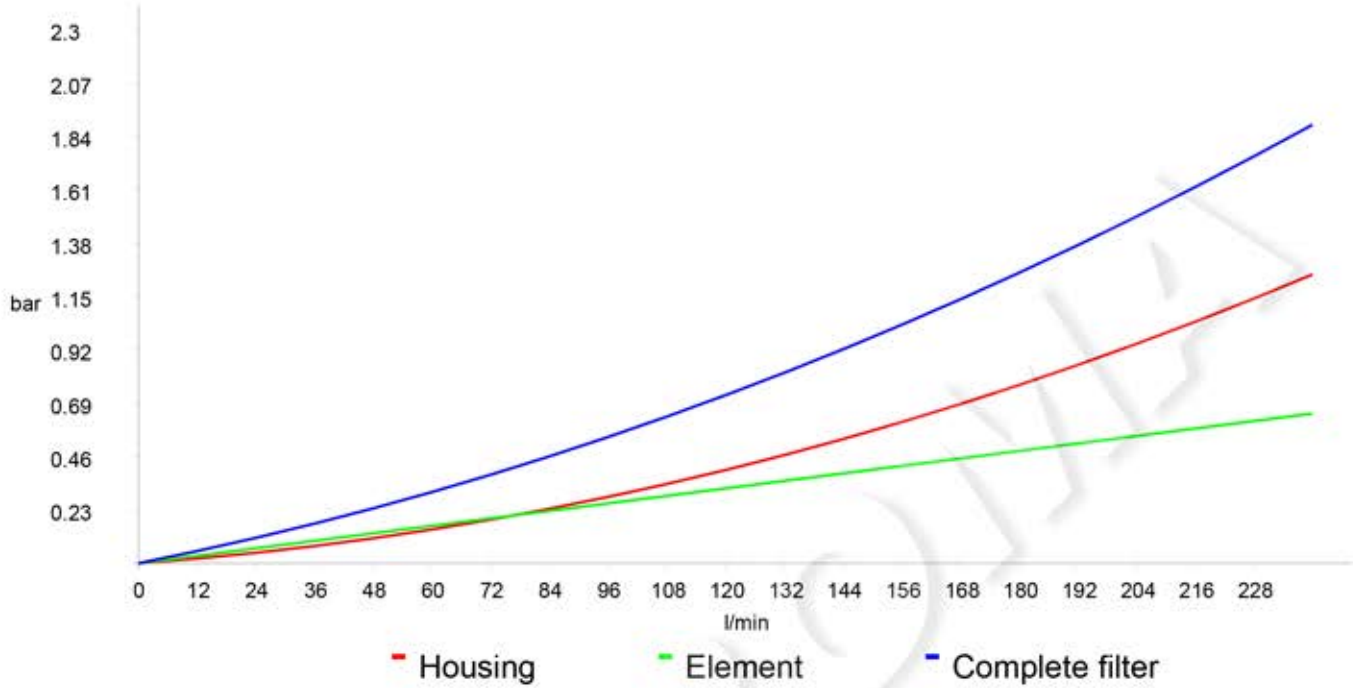

Delta P/T (Flow rate: 200 l/min)

