

Part number:

HYDROMA

HYDRAULICKÉ SYSTÉMY

**HIDROMA
SYSTEMS**

UKŁADY HYDRAULICZNE

HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

End Elements basic

TC-00-__-



Description

The outlet elements TC-00-__ are available in two versions:

- Body made of Black Anodized Aluminium (Al).
- Body made of Yellow Zinc plated (Cr+3) Cast Iron (CI).

They are employed as end plates to plug the P and T channels of the ED elements of the Directional Valve Assembly, when there are no downstream operators.

Technical data

General		
Weight	kg (lbs)	0.16 (0.35)
TC-00-...-AL element		
Weight	kg (lbs)	0.44 (0.96)
TC-00-...-CI element		
Ambient Temperature	°C (°F)	-20....+50 (-4....+122) (NBR seals)
Hydraulic		
Maximum pressure for aluminium version (AL)	bar (psi)	250 (3625)
Maximum pressure for Cast Iron version (CI)	bar (psi)	310 (4500)
Hydraulic fluid	Mineral oil based hydraulic fluids HL (DIN 51524 part 1). Mineral oil based hydraulic fluids HLP (DIN 51524 part 2). For use of environmentally acceptable fluids (vegetable or polyglycol base) please consult us.	
General properties: it must have physical lubricating and chemical properties suitable for use in hydraulic systems such as, for example:		
Fluid Temperature	°C (°F)	-20....+80 (-4....+176) (NBR)
Permissible degree of fluid contamination	ISO 4572: $\beta_{75} \geq 75$ $X=12...15$ ISO 4406: class 20/18/15 NAS 1638: class 9	
Viscosity range	mm ² /s	5....420

Note

For applications with different specifications consult us

Ordering details

01	02	03
TC	- 00 - 00 - 00 -	

Family

01	Outlet Elements	TC
----	-----------------	----


Configuration

02	Basic	00
----	-------	----


Material

03	Aluminium	AL
	Cast iron	CI

Symbol

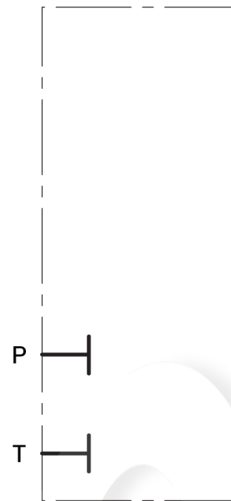

External dimensions and fittings

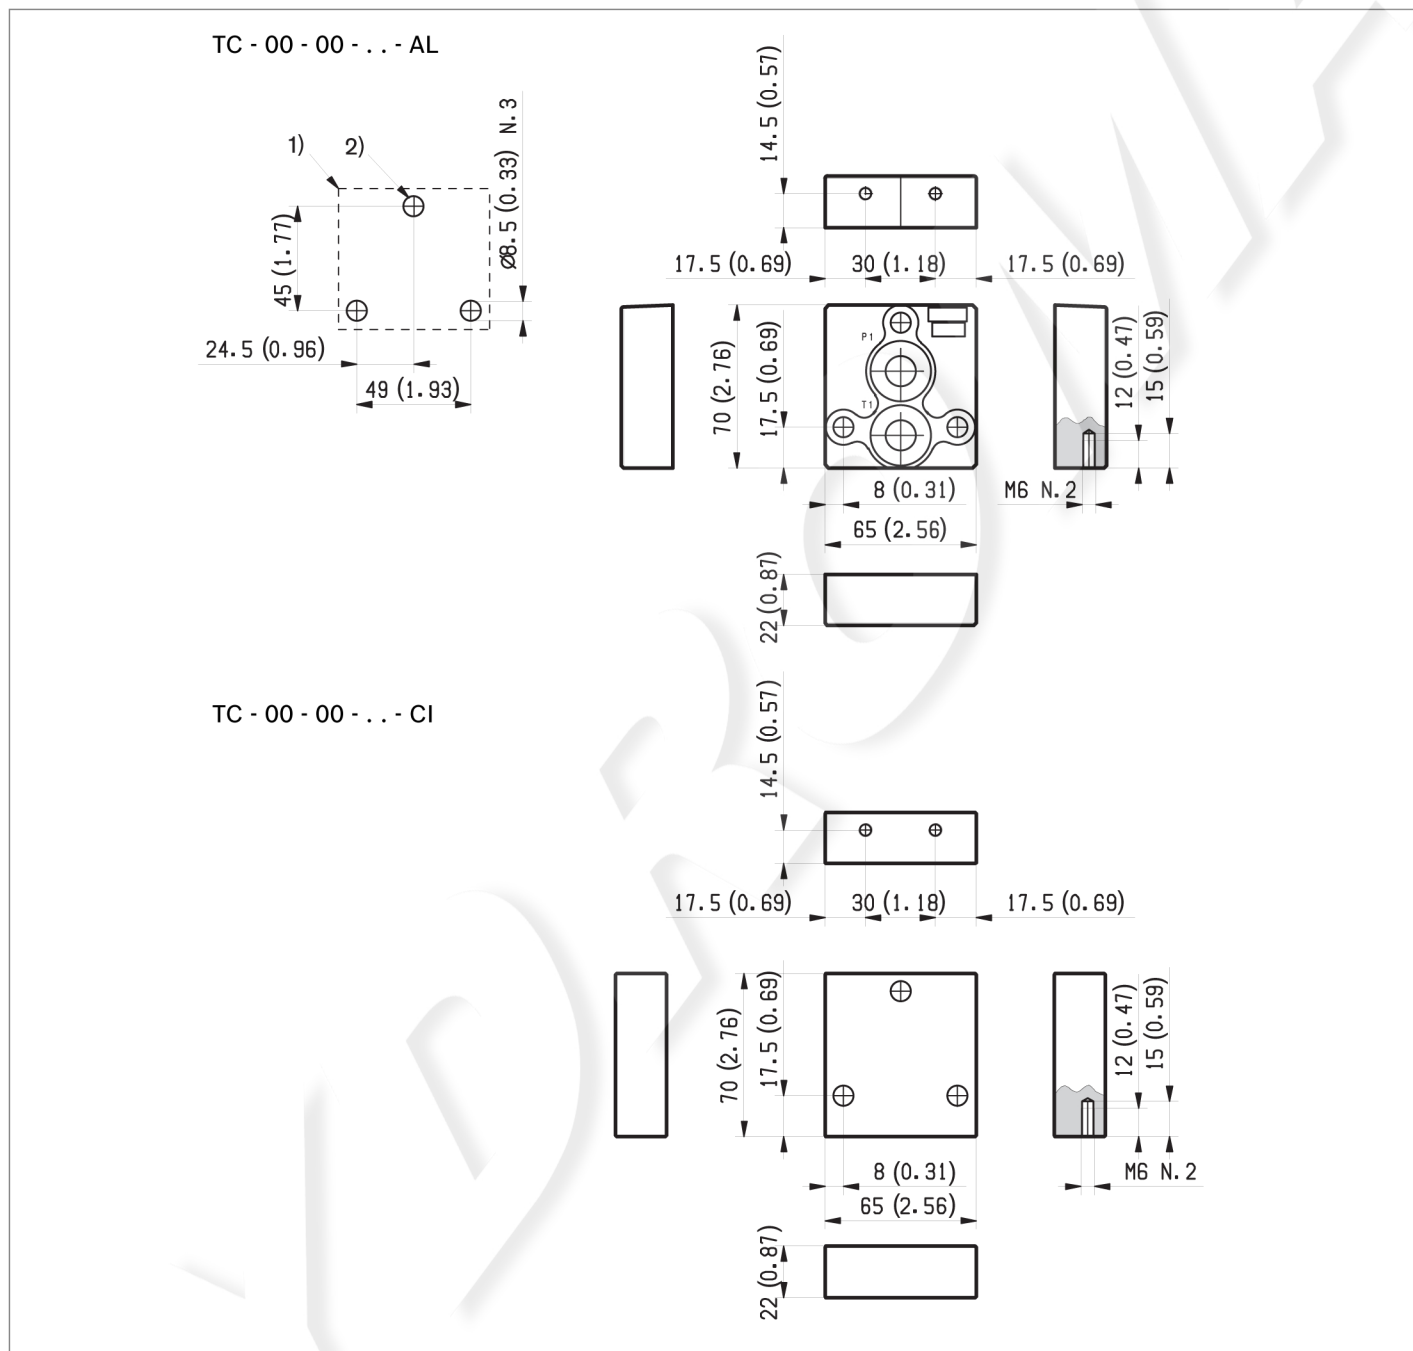

1 Flange specifications for coupling to the ED Directional Valve Elements.

2 For tie rod and tightening torque information see data sheet RE 18301-90.