


Warning !  are not shielded and must be shielded by an interactive guarding system. COMER spa declines responsibility if proper guards are not provided or maintained.

Notes:

 CERTIFIED

End fittings

Tractor Cod: C12
Implement Cod: 112

Max. torque

-

Series: T
Type: 50
Code: 07.525.011.10
Description: T501010ENC12112
Customer's code: -
Colour: Yellow

Last drawing

Index: - Date: -

Application

Driveline data

X	1 3/8" Z6	DIN 9611
Y	1 3/8" Z6	DIN 9611
E	860-33.86"	
I	875-34.45"	
P	790-31.1"	

Overlap

Steel tubes	Guard
Max. 831-32.72"	770-30.31"
Min. 284-11.18"	223-8.78"


Greasing point

- 1) -
- 2) -

The dimensioning is cross to cross


Cross and tubes

	51.6x3
	80
	45x4

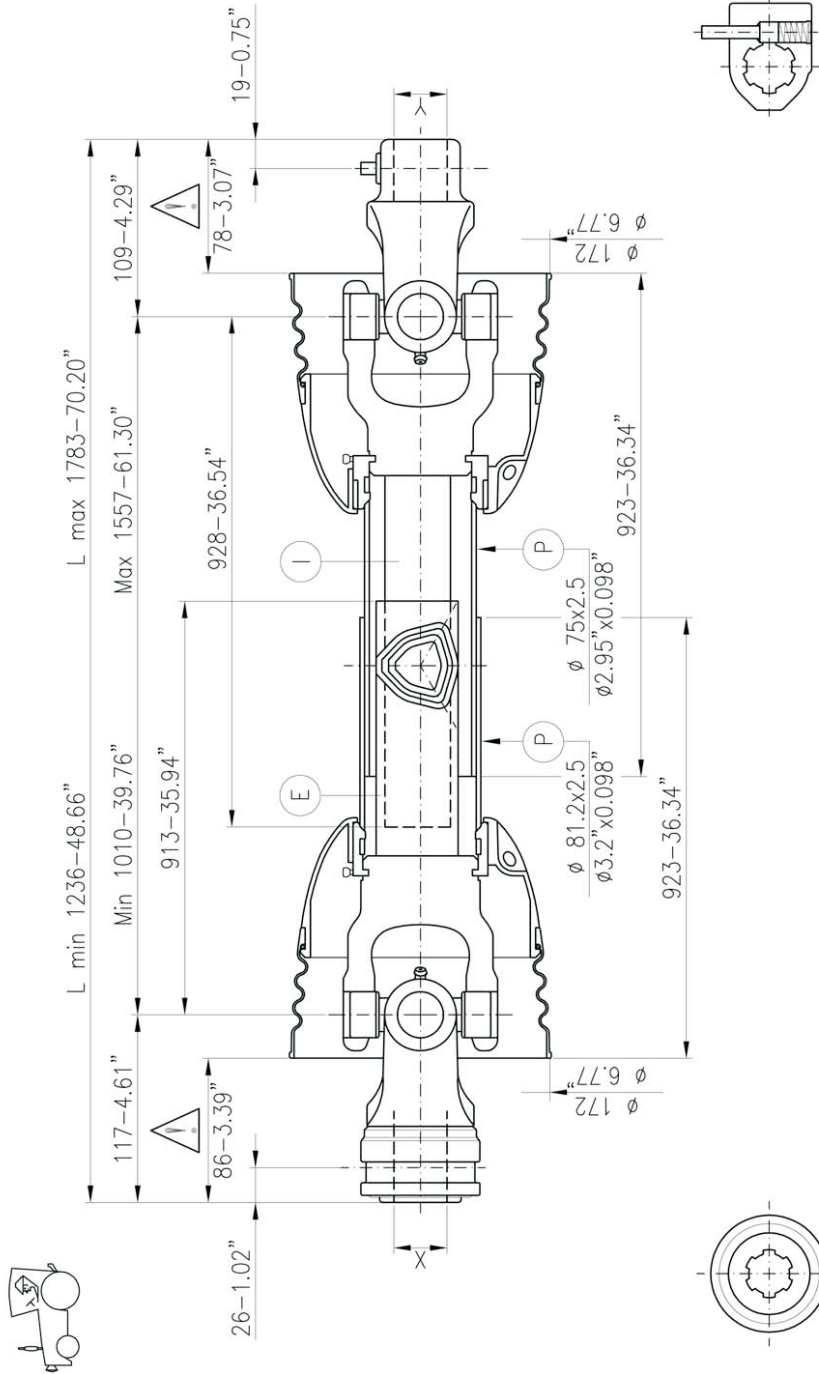

Customer:

Data for only critical velocity	
540 r.p.m.	1000 r.p.m.
Max. -	Max. -
L max. -	L max. -
Checked:	Signed by: P.L.
Date:	

1100 min. r.p.m.	max.
	

Data 1000 r.p.m.			
KW	CV	Nm.	in.lb.
54	74	520	4600

Data 540 r.p.m.			
KW	CV	Nm.	in.lb.
35	47	620	5500

Continuous operation data and conditions, working angle 5°, average life 1000 hours