


Warning !
Sections of driveline marked  are not shielded and must be shielded by an interactive guarding system. COMER spa declines responsibility if proper guards are not provided or maintained.

Notes:

CE CERTIFIED

End fittings **Max. torque**

| | | | |
|-----------|----------|-------------|---|
| Tractor | Cod: C12 | Max. torque | - |
| Implement | Cod: 112 | Max. torque | - |

| | |
|-------------------------|-----------------|
| Series: | T |
| Type: | 80 |
| Code: | 07.825.030.10 |
| Description: | T801210ENC12112 |
| Customer's code: | - |
| Colour: | Yellow |

Last drawing

Index: - Date: -

Application

Driveline data

| | |
|---|--------------------|
| X | 1 3/8" Z6 DIN 9611 |
| Y | 1 3/8" Z6 DIN 9611 |
| E | 1020-40.16" |
| I | 1035-40.75" |
| P | 950-37.4" |

Overlap

| | |
|--------------------|-----------------------|
| Steel tubes | Guard |
| Max. | 985-38.78" 930-36.61" |
| Min. | 358-14.09" 303-11.93" |


Greasing point

- 1) -
- 2) -

The dimensioning is cross to cross

Cross and tubes

| | | | | |
|----|---|-------|---|------|
| 35 |  | 106.5 |  | 54x5 |
| | | | | 63x4 |

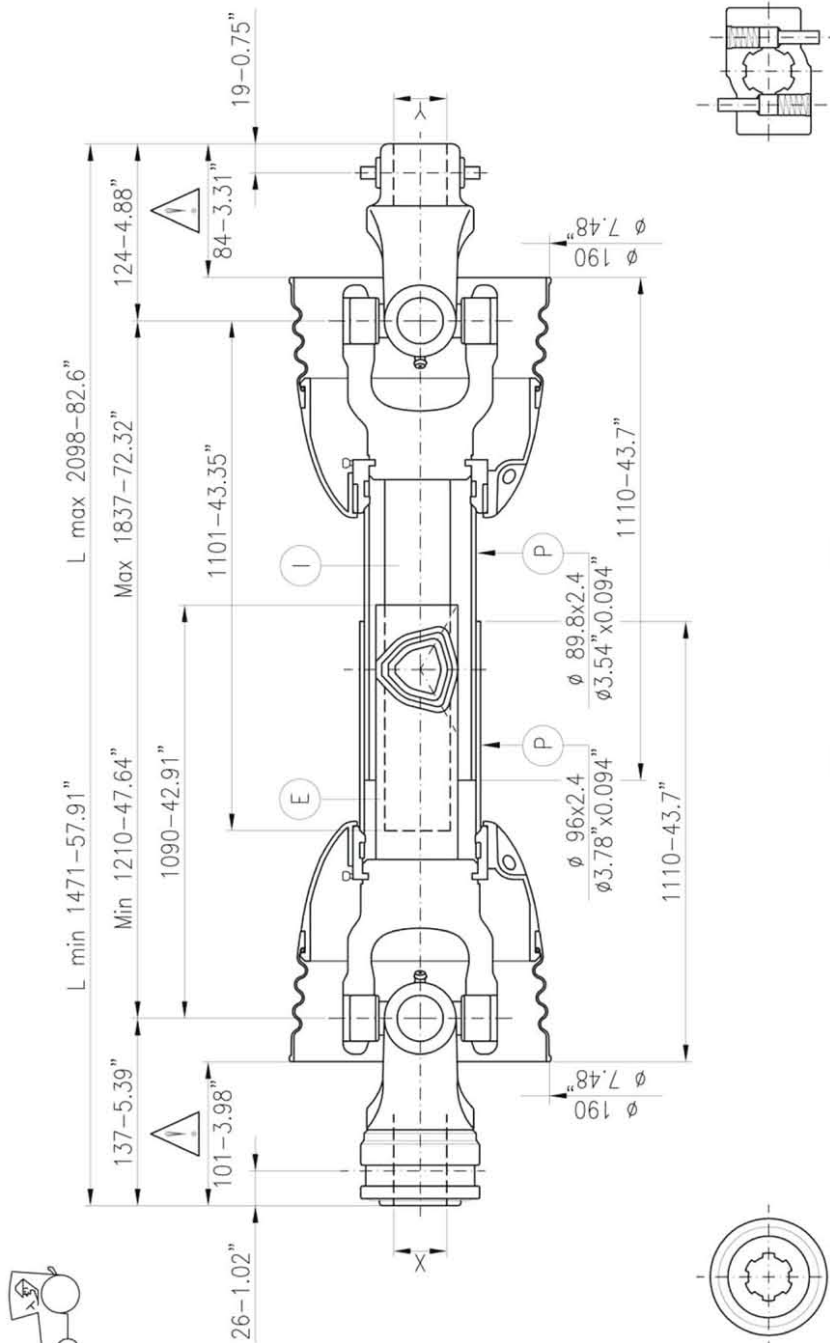

Customer:

| | |
|--|-----------------|
| Data for only critical velocity | |
| 540 r.p.m. | 1000 r.p.m. |
| Max. | Max. |
| L max. | L max. |
| Checked: | Signed by: P.S. |
| | Date: |

| | | | | | |
|-------------------------|-----|------------------------|--------|--|-------|
| Data 1000 r.p.m. | | Data 540 r.p.m. | | 1100 min. r.p.m. max. r.p.m. max. | |
| KW | CV | Nm. | in.lb. | KW | CV |
| 110 | 150 | 1050 | 9300 | 70 | 95 |
| | | | | 1240 | 10950 |

Continuous operation data and conditions, working angle 5°, average life 1000 hours