


APPROVATO	
Data 04-05-05	Firma Belotti

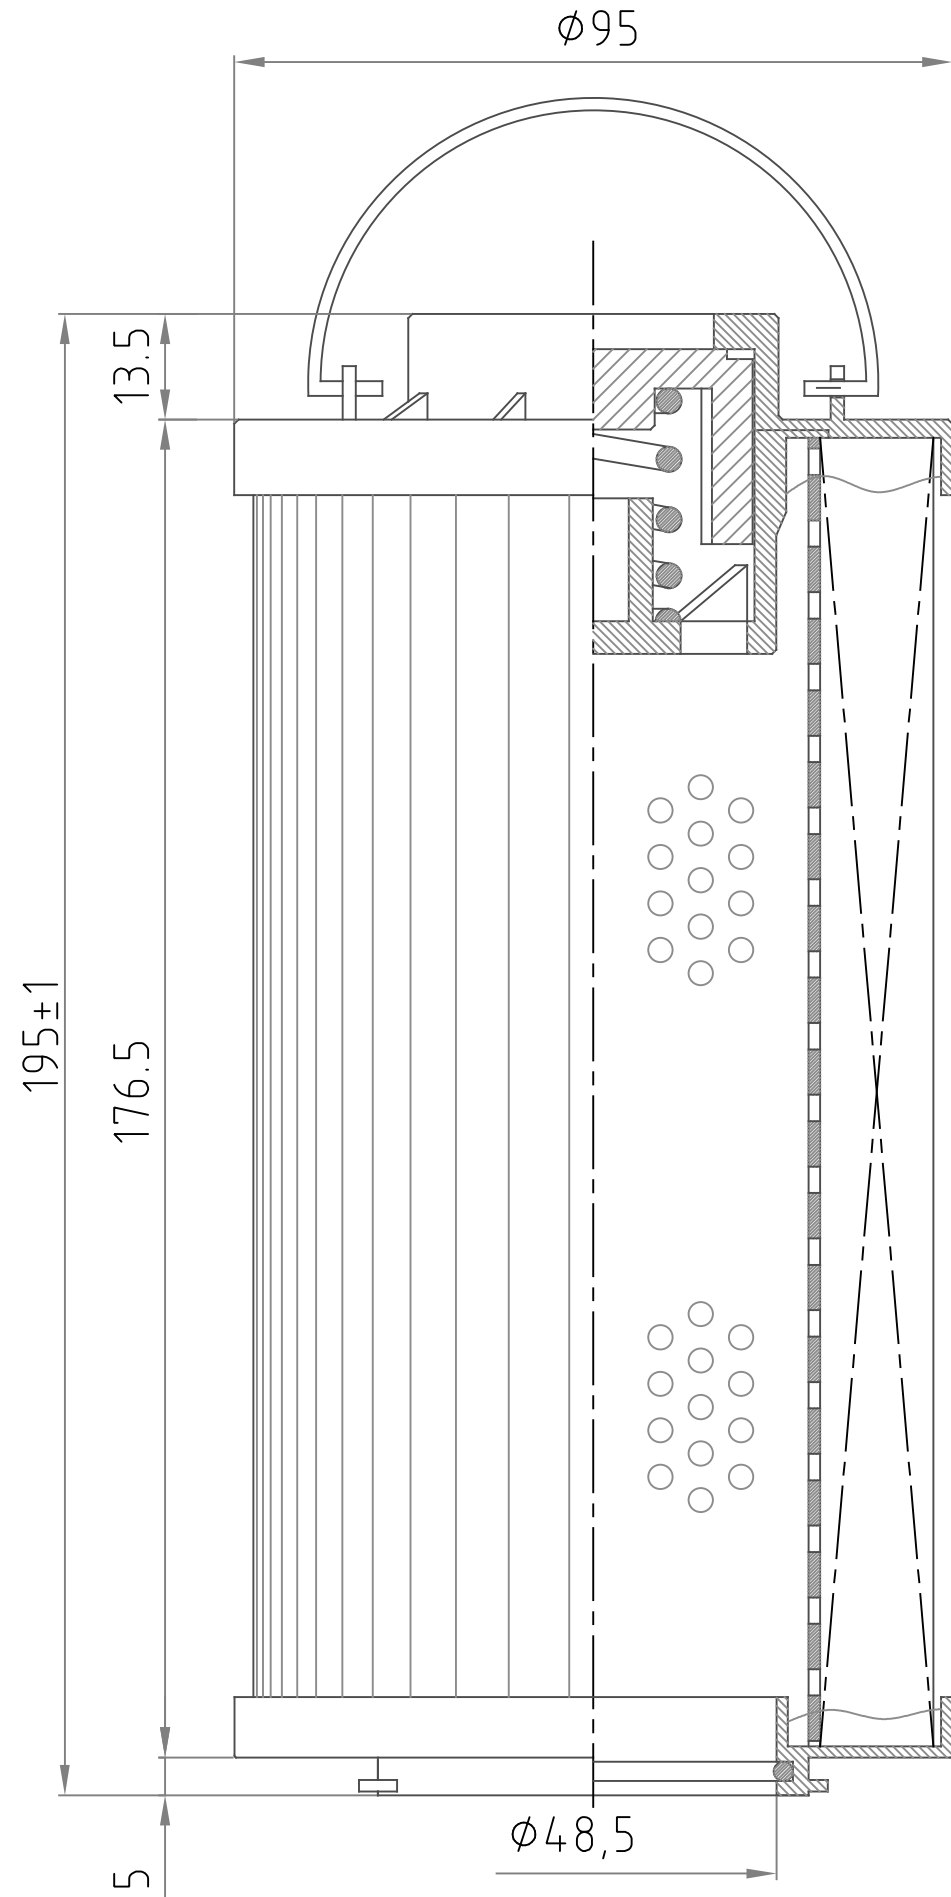

TECHNICAL DATA.

MATERIALS

- End rings: Polyammide
- Inner core: Zinc plated steel
- Gasket: NBR 70 shore A ± 5 %

FILTER ELEMENT CHARACTERISTIC

- Oil flow. From: External / To: Internal
- Filter media: Fiber 12 µm (c) B>1.000 ISO 16889
- Filter area: 3.377 cm<sup>2</sup>
- Collapse pressure: 10 bar

VALVES (ISO 3968)

- BY-PASS / Opening Pressure: 3 bar ±10%

TEMPERATURE (ISO 2943)

- Working temperature. From: - 25 °C / To: +110 °C

COMPATIBILITY (ISO 2943)

- Full with fluids: HH-HL-HM-HV-HTG (according to ISO 6743/4)

Modifiche/Revisions:

(Prodotto)	PLANET FILTERS S.p.A.			
SHR0330				Bolgare BG
(Materiale)	Data	Nome	(Superfici)	
	Disegn. 04-05-05	BELOTTI	-	
	Contr. 04-05-05	A.M.	Originale	(Denominazione)
	Tolleranze generali		A3	SHR0330FD11
	Quote senza indicazione di tolleranza: ISO 2768-fK		N° Disegno	Rev. Tavola
	(Peso)	Scala 1:1	041.0030.3	1/1
	Dis. Grezzo	Sostituito da:		Sostituisce: