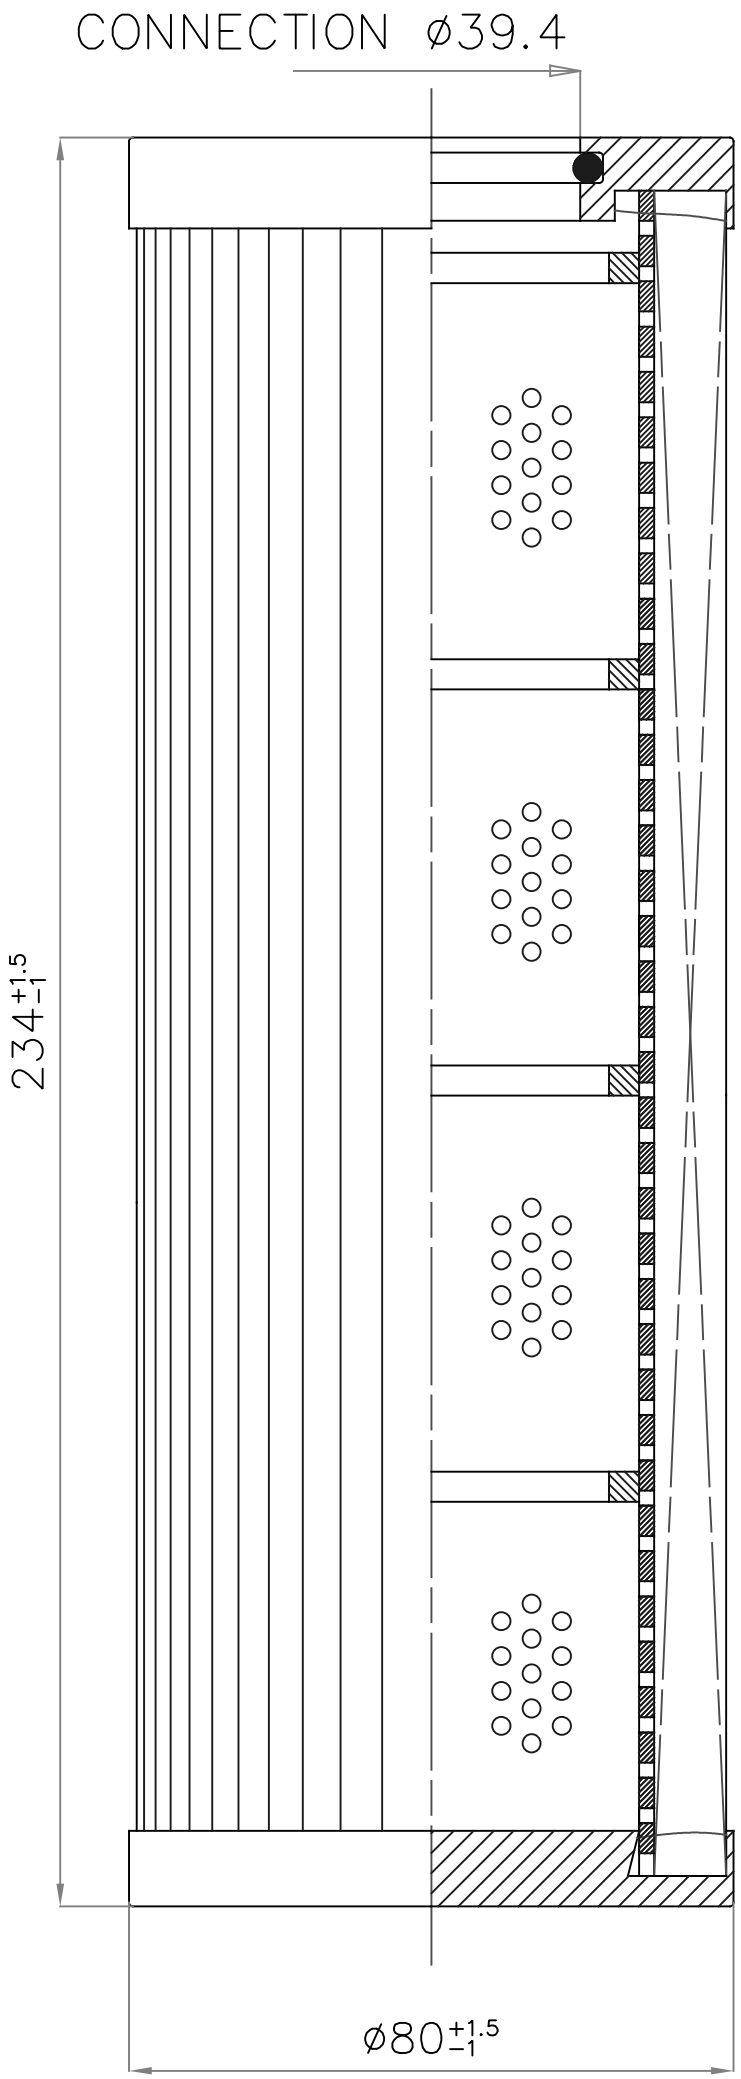


TECHNICAL DATA.

MATERIALS
End ring and end cap: Zinc plated Steel
Inner core: Zinc plated Steel
Gasket: NBR 70 Sh. A ±5

FILTER ELEMENT CHARACTERISTIC
Oil Flow. From: External / To: Internal
Filter Media: Fiber 12 µm (c) ß > 1000 ISO 16889
Filter Area: 3019 cm²
Collapse Pressure: Min. Δp 210 bar (21 MPa)

TEMPERATURE (ISO 2943)
Working Temperature. From: −25 °C / To: +110 °C

COMPATIBILITY (ISO 2943)
Full with fluids: HH−HL−HM−HV−HTG
(according to ISO 6743/4)

PACKING
Packaging Filter in a single box

APPROVATO
BELOTTI 01−04−09

| N° | MODIFICHE | Proposta | Data | CODICE / UGUAGLIANZA |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |
| | | | | |

| | | | |
|---|---|---|---|
| PLANET FILTERS S.p.A. | Gruppo: SV | Materiale | — |
| | Particolare: SV30823FD2 | Stato | — |
| | Peso del pezzo in Kg — Grezzo / Lavorato | Trattam. | — |
| | scala 1 : 1 | sostituisce il DIS. N° | sostituito dal DIS. N° |
| | Disegnato: BELOTTI | | |
| | Controllato: T.R. | CODICE | |
| | Data 01−04−09 | 042.0063.3 | |

Proprieta' riservata protetto a termini di legge