

Part number:



HYDROMA

HYDRAULICKÉ SYSTÉMY

**HIDROMA
SISTEMS**

UKŁADY HYDRAULICZNE

HYDROMA

ГИДРАВЛИЧЕСКИЕ СИСТЕМЫ

Single counterbalance

A-VBSO-SE-30-PI-PL

08.39.59 - X - Y - Z

RE 18307-32

Edition: 03.2016


Replaces: 07.2012



Description

When pressure at V2 rises above the spring bias pressure, the check seat is pushed away from the piston and flow is allowed from V2 to C2. When load pressure at C2 rises above the pressure setting, the direct operated, differential area, relief function is activated and flow is relieved from C2 to V2. With pilot pressure at V1-C1, the pressure setting is reduced in proportion to the stated ratio of the valve, until opening and allowing flow from C2 to V2. The spring chamber is drained to V2, and any back-pressure at V2 is additive to the pressure setting in all functions.

Note: port identified with M are not protected with calibrated orifice but in direct connection with pressure channels.




Technical data

Max. operating pressure	410 bar (5945 psi)
Max. flow	60 l/min. (16 gpm)
Weight	see "Dimensions"
Manifold material	Zinc plated steel
Fluid	Mineral oil (HL, HLP) according to DIN 51524
Fluid temperature range	-30 °C to 100 (-22 to 212 °F)
Viscosity range	5 to 800 mm ² /s (cSt)
Recommended degree of fluid contamination	Class 19/17/14 according to ISO 4406
MTTFd	150 years see data sheet 18350-51
Other technical data	see data sheet 18350-50
Relief setting:	at least 1.3 times the load induced pressure.
For higher stability at all flows and pressures, the pilot line includes hydraulic damping.	

Note: for applications outside these parameters, please consult us.

Characteristic curve

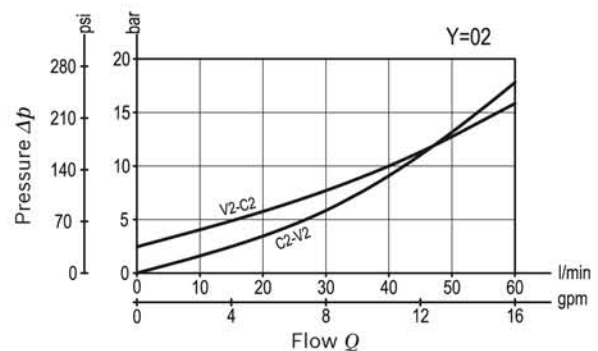

Ordering code

08.39.59	X	Y	Z
----------	---	---	---

Single counterbalance


Pilot ratio

03 4.2 : 1

Port sizes	V1 - V2	C1 - C2	M
02	G 3/8	G 3/8	/
03	G 1/2	G 1/2	G 1/4

	SPRINGS		
	Adj. pressure range bar (psi)	Pres. increase bar/turn (psi/turn)	Std. setting Q=5 (l/min) bar (psi)
20	60-210 (870-3000)	63 (914)	200 (2900)
35	180-350 (2610-5000)	138 (2001)	350 (5000)

Pressure setting up to 410 bar: code on request.


Tamper resistant cap code ordering code 11.04.23.002
 Mat. no. R930000752 

Preferred types

Type	Material number
083959030220000	R930006757
083959030235000	R930006443
083959030320000	R930006758

Type	Material number
083959030335000	R930006759

Dimensions

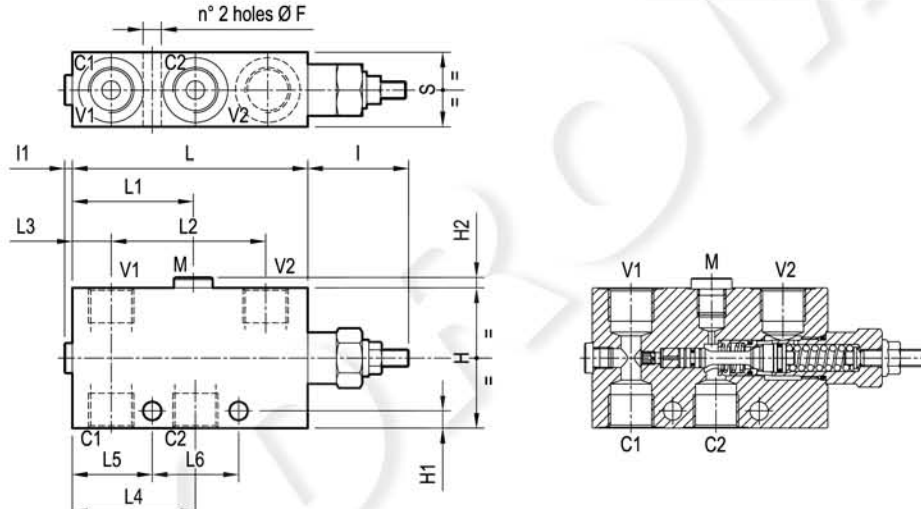

35	40	37.3	57.3	18	71	55.3	109	3.5	47	5	8	65	8.5		G 1/2	1.81
(1.38)	(1.58)	(1.47)	(2.26)	(0.71)	(2.8)	(2.18)	(4.29)	(0.14)	(1.85)	(0.2)	(0.32)	(2.56)	(0.34)			(3.99)
30	40	37.3	57.3	18	71	-	109	3.5	47	-	8	55	8.5		G 3/8	1.3
(1.18)	(1.58)	(1.47)	(2.26)	(0.71)	(2.8)	-	(4.29)	(0.14)	(1.85)	-	(0.32)	(2.17)	(0.34)			(2.87)
S	L6	L5	L4	L3	L2	L1	L	I1	I	H2	H1	H	F		Y	Weight kg (lbs)